



Fire Retardant Treated Wood

SaferWood-FX® Now Available with Arbor Wood Co. Thermally Modified Pine

SaferWood-FX Advantages


- Class A Fire-Test Response per ASTM E84/UL 723 Extended 30 Minutes
- Permits use of wood under restrictive “ignition-resistant” codes
- Only FRTW that is IWUIC compliant per ICC-ES, ESR-1159 & ESL-1021
- SaferWood reduces insurance rates
- Consistent color / Mar-free Finish
- Appearance grade finish - exterior
- Delays on-set of weathering
- Non-toxic and Non-leaching
- Non-corrosive and decay resistant
- One-time factory treatment provides permanent protection
- Only FRTW to pass 10-year outdoor weathering test for OSFM California
- Only FRTW to carry a limited lifetime warranty
- Can be dyed, stained, or painted*
- 42 years’ treating experience




**Permanent Protection.
Proven Performance.**

Real Wood. Made Safer

- ✓ First and only FRTW to be evaluated ignition-resistant per 2018 IWUIC (International Wildland Urban Interface Code), Section 503.2, Item 3, FRTW.
- ✓ Pressure-impregnated per 2018 International Building Code (IBC) 2303.2.1 for all surface, permanent protection.
- ✓ Kiln-dried after treatment per 2018 International Building Code (IBC) 2303.2.8 for certified moisture content.
- ✓ Passed ASTM E2768-11 Fire-test response Extended 30- minutes per ASTM E84/UL723 after ASTM D2898 Accelerated Weathering for a better than Class 1/A Exterior FRTW rating.
- ✓ ICC-ES ESR 1159 (USA), ICC-ES ESL 1021 (Canada), and ICCES ESR-1410 Fire Retardant Wood Roofing.

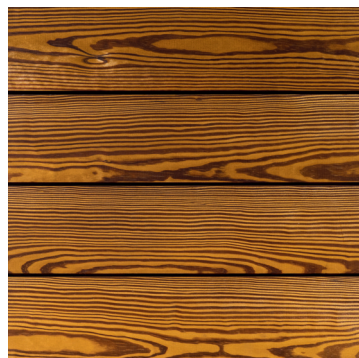

Thermally Modified Pine Siding

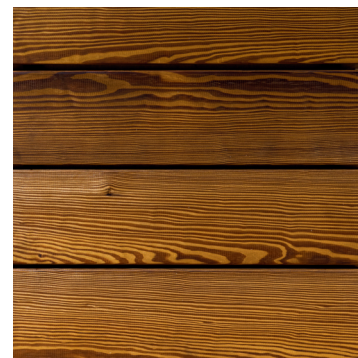

Thermally Modified Pine Decking

Real Wood. Made Safer.™
World-class Exterior FRTW since 1981



SaferWood® with Thermex-FR® by Chemco - Proudly serving customers across North America, Europe, Australia, and Japan.

Chemco, Inc. | www.saferwood.com | info@chemco.org | 1+360-366-3500



Scan for ICC ESR-1159